
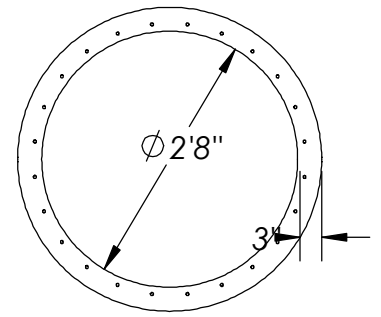


APPROVED BY: \_\_\_\_\_


DATE: \_\_\_\_\_

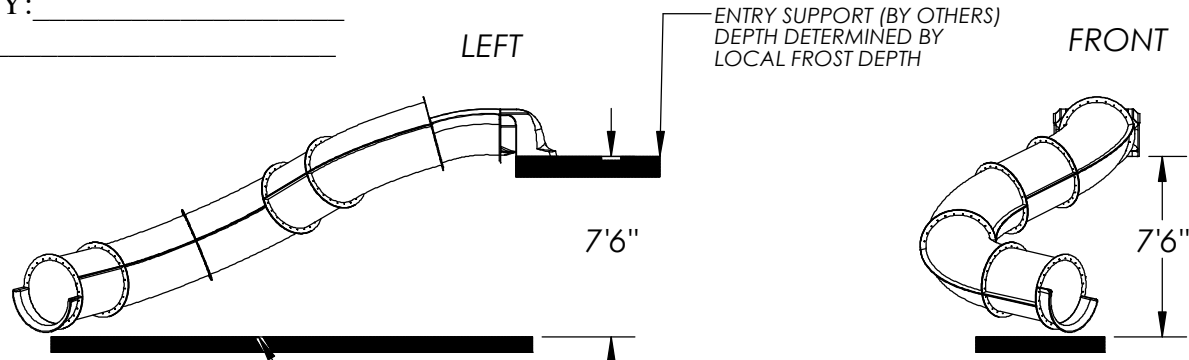


**FLUME DIMENSIONS**

COPING LEVEL (0'-0") ALL ELEVATION DIMENSIONS ARE DERIVED FROM THIS LINE

Ø 16" PIERS (BY OTHERS) DEPTH DETERMINED BY LOCAL FROST DEPTH

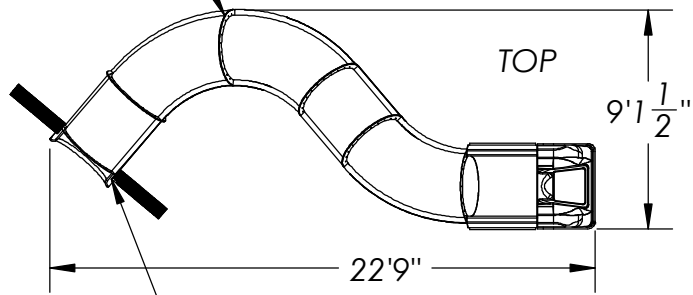

EXTENDS PAST COPING EDGE

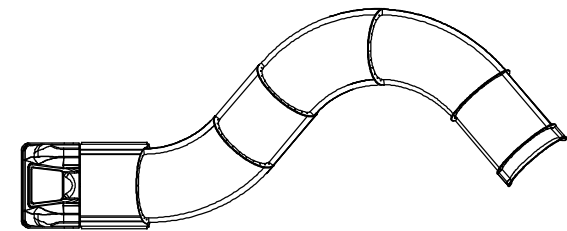

**RE32-25 B**

ALL 32" OPEN AND ENCLOSED FLUME SLIDES ARE CONSTRUCTED OF LAMINATED FIBERGLASS REINFORCED MARINE GELCOAT SURFACE.

MATERIAL THICKNESS: 1/4"-3/8"

STEEL SUPPORTS: 3

FLUME TYPE	ENCLOSED
CL LENGTH	25.9'
ELEVATION	7'-6"
ENTRY ANGLE	15°
SLOPE	????%
FALL PER FOOT	?????"
GPM REQUIRED	150-175
WATER DEPTH	4'-0" MINIMUM

TITLE: **PRE-DESIGNED**

SIZE  
**A**

**RE32-25**

REV



PO Box 486  
Adamsville, TN 38310  
P: 731.632.1407  
F: 731.632.3739

www.dolphinwaterslides.net  
sales@dolphinwaterslides.net

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DOLPHIN WATERSLIDES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DOLPHIN WATERSLIDES, INC IS PROHIBITED.

DRAWN B.Thomas 6/18/2010

SCALE: 1:96 1/8" = 1'