



ALL 32" OPEN AND ENCLOSED FLUME SLIDES ARE CONSTRUCTED OF LAMINATED FIBERGLASS REINFORCED MARINE GELCOAT SURFACE.

MATERIAL THICKNESS: 1/4"-3/8"

FRONT

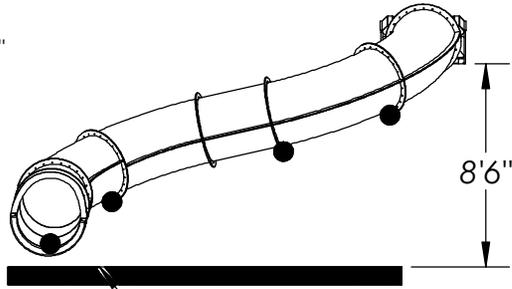


RIGHT

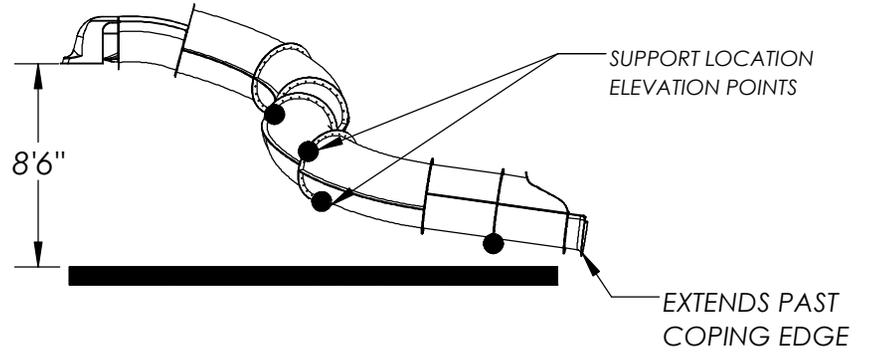



APPROVED BY: _____
DATE: _____

COPING LEVEL (0'-0") ALL ELEVATION DIMENSIONS ARE DERIVED FROM THIS LINE

ENTRY LANDING/SUPPORT AND Ø 16" PIERS (BY OTHERS) DEPTH DETERMINED BY LOCAL FROST DEPTH

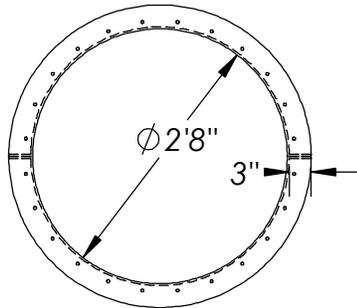

FLUME DIMENSIONS

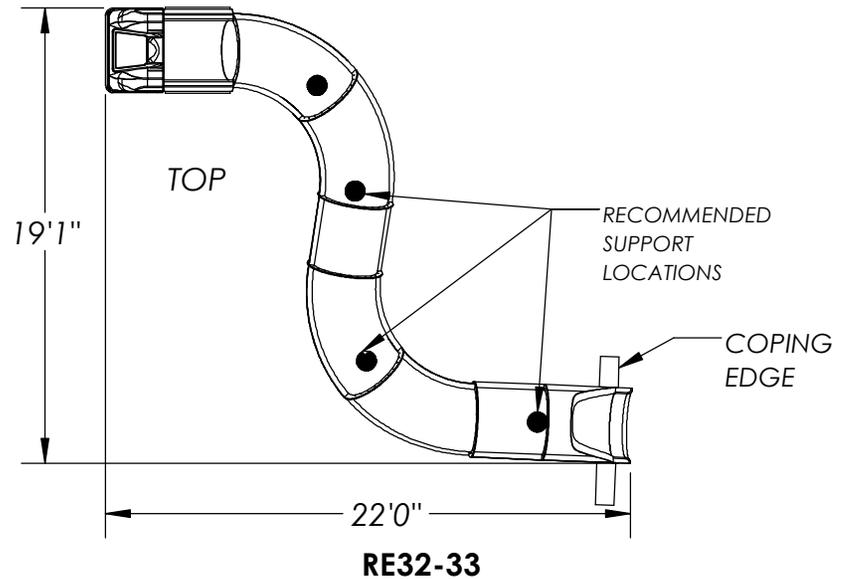

STEEL SUPPORTS: 4

FLUME TYPE	ENCLOSED
CL LENGTH	33.61'
ELEVATION	8'-6"
ENTRY ANGLE	15°
SLOPE	23.5 %
FALL PER FOOT	2.86"
GPM REQUIRED	150-175
WATER DEPTH	4'-0" MINIMUM

OFFERED IN EITHER LEFT "OR" RIGHT HAND TURN

TITLE:

MODEL SLIDE

SIZE

**RE32-33B
RE32-33**

REV

A

DRAWN

B.Thomas 2/13/2018

SCALE: 1:96 - 1/8" = 1'



PO Box 486 Adamsville, TN 38310 P: 731.632.1407 F: 731.632.3739

www.dolphinwaterslides.net sales@dolphinwaterslides.net

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DOLPHIN WATERSLIDES, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DOLPHIN WATERSLIDES, INC IS PROHIBITED.