

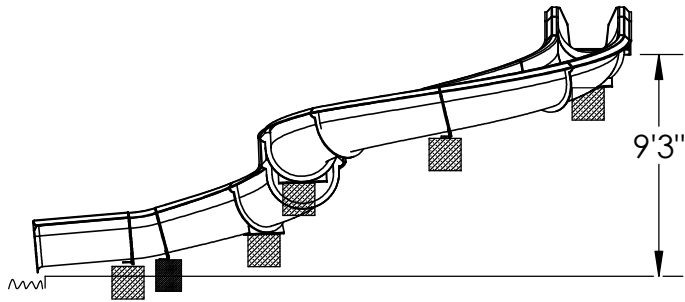
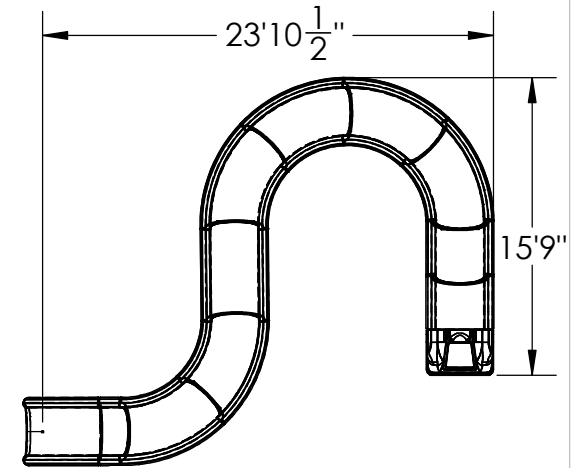


FRONT

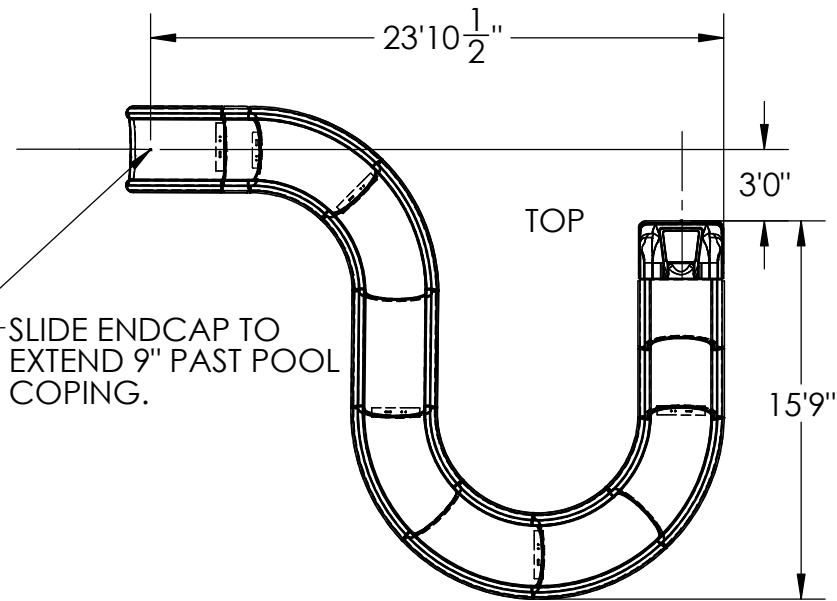

APPROVED BY: _____

DATE: _____

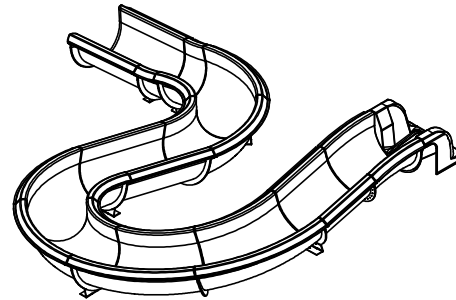

RB32-46B
MIRRORED

ALL 32" OPEN AND ENCLOSED
FLUME SLIDES ARE CONSTRUCTED OF
LAMINATED FIBERGLASS
REINFORCED MARINE
GELCOAT SURFACE.

MATERIAL THICKNESS: 1/4"-3/8"

STEEL SUPPORTS: 6

FLUME TYPE	32" OPEN
CL LENGTH	46.67'
ELEVATION	9' 3"
ENTRY ANGLE	15°
SLOPE	20.94%
FALL PER FOOT	2.51"
GPM REQUIRED	125-150
WATER DEPTH	4'-0" MINIMUM

TITLE: **RB32-46 OR RB32-46B**

SIZE

A

PRE-DESIGN

REV



PO Box 486 P: 731.632.1407
Adamsville, TN 38310 F: 731.632.3739

www.dolphinwaterslides.net
sales@dolphinwaterslides.net

SCALE: 1:96 - 1/8" = 1'

DRAWN 10/17/17 RJ

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
DOLPHIN WATERSLIDES, INC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
DOLPHIN WATERSLIDES, INC IS
PROHIBITED.